




SILICONE 1515

SILICONE1515_ K_ mt



fix lenght



15 W mt



on board



24V



2835



Gold plated PAD



CRI

A++


CRI>90

Silicone 1515 it is a silicon rubber tube encapsulating 15W/ meter strip led, with IP65 connector male and female depending on request. several lenght are available. 0,5 meter, 1mt, 2mt, 3mt, 4mt, 5mt. Available Color 2k7, 3k, 4k, 5k.

TECHNICAL SPECIFICATION

	unit	Typical
ELECTRICAL		
Power supply	Vdc	24
Total current	A	3,2
Total power	W	75
Current per meter	A	0,6
Power per meter	W	15
THERMAL		
Operating Temperature TC	C°	70
Life Time (25C° PCB surface)	h/24	50000

PHOTOMETRY

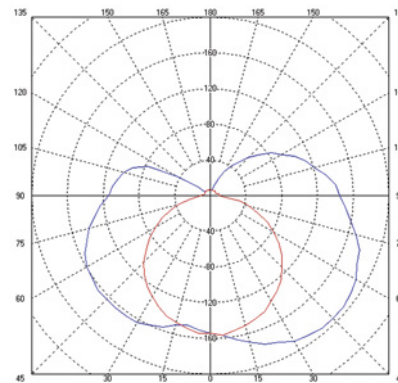


★ TEMPERATURE OPTIONS

2K7


3K

4K

5K



SEZIONE A-A
SCALA 1 : 1

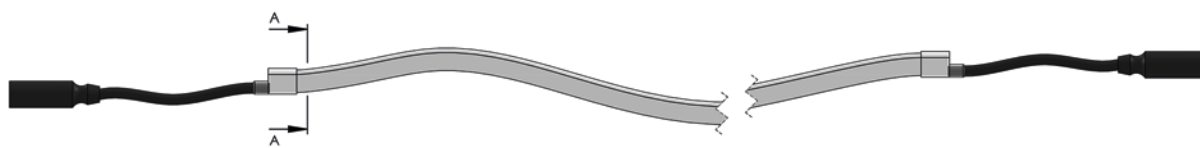

	unit	Typical			
OPTICAL					
Led per meter		140			
Led model		2835			
Light emission angle		140			
Luminous efficiency	lm/W	100			
	unit	2700k°	3000k°	4000k°	5000k°
Luminous flux per meter	lm/mt	900	950	1000	1100

	unit	Typical
MECHANICALS		
Width	mm	15x15
Available Lenght	mt	0,5 1 2 3 4 5

HOW TO FILL IN THE PRODUCT CODE?

1 - code to be completed:
SILICONE1515_ K _mt

2 - the item (K) is indicated in the temperature options indicated with the icon ★:

DDS738_3K _mt

3 - the item (mt) is indicated in the second row of the MECHANICALS table:

DDS738_3K_2mt