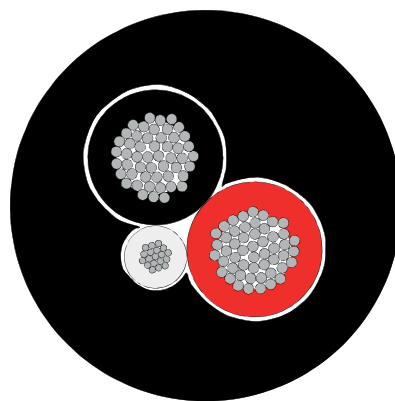


## Cv.overled.s03

Special Cable 2x2.50mm<sup>2</sup> + 1x0.35mm<sup>2</sup> O.D. 9.70mmCavo Speciale 2x2.50mm<sup>2</sup> + 1x0.35mm<sup>2</sup> O.D. 9.70mm

Cable conforming to  
Standard 2002/95/CE  
(RoHS)

Features (Conductor)	Unit	2.50mm <sup>2</sup>	0.35mm <sup>2</sup>
Material of external cover		Tin Copper	Tin Copper
Color of external Cover		Black similar RAL 9005	
Stranding	n°x mm	50x0.25	19x0.15
Section	mm <sup>2</sup> / AWG	2.50/14	0.34/22
Electrical resist.	ΩxKm	<7.80 (IEC60344)	<57.1 (IEC60344)
Copper Standard		EN1362 – ETP1	EN1362 – ETP1

Features (Insulation)	Unit	2.50mm <sup>2</sup>	0.35mm <sup>2</sup>
Conductor nr.		2	1
Diameter	mm	3.50 +/- 0.10	1.55 +/- 0.10
Compound		Themoplastic LS0H compound	Themoplastic LS0H compound
Hardness	ShD	49	49
Color		Black – Red	White

Features (Jacket)	Unit	
Compound		Themoplastic LS0H compound
Avg. Thickness	mm	1.30 (nom.)
Hardness	ShD	40
Color		Black similar RAL 9005
Diameter		9.70 +/- 0.25mm

## Product code

CV.OVERLED-SC03